


Essential for Today  
Potential for Tomorrow

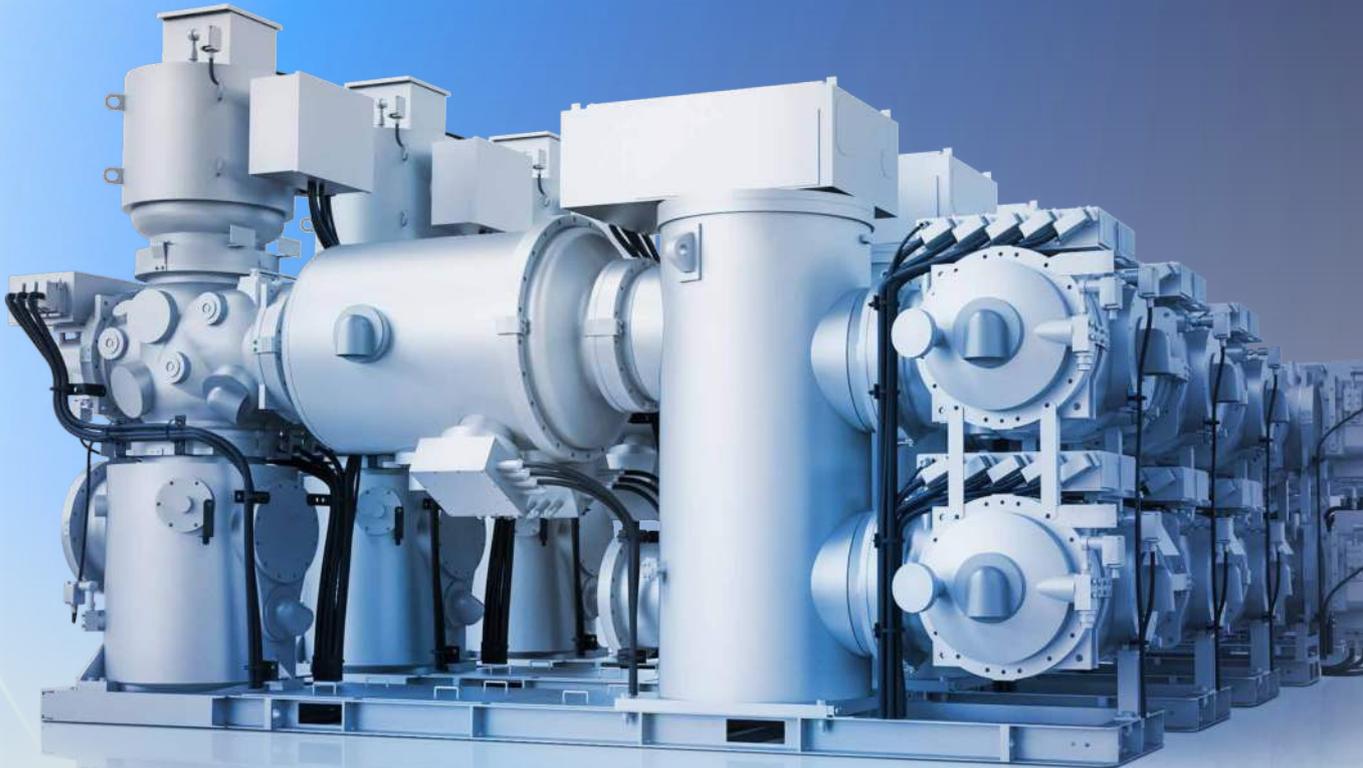

# Gas Insulated Switchgear

From 72.5 kV to 800 kV

## HD HYUNDAI Gas Insulated Switchgear

- ▶ Manufacturing up to 800 kV
- ▶ Wide range of products to fit any customer requirements
- ▶ Designed and tested according to the latest IEC standards

### Contents


- 05 \_ Features
- 08 \_ Technical Data
- 10 \_ Product Range
- 21 \_ Research & Development
- 22 \_ Inquiry Form

## Gas Insulated Switchgear to meet future power requirements with many excellent features

The SF<sub>6</sub> Gas Insulated Switchgear (GIS) contains major substation equipment, such as gas circuit breaker, disconnecting switch, earthing switch, voltage transformer, current transformer, and lightning arrester in the grounded metallic enclosure and is filled with SF<sub>6</sub> gas, which has the best insulation and arc-quenching capabilities.

Accordingly, GIS is the most advanced switchgear with many excellent features including compactness, safety, high reliability, easy operation, long maintenance intervals and compatibility with its surroundings.

Especially, the development of the 3-phase encapsulated GIS achieves more economical and compact substation.

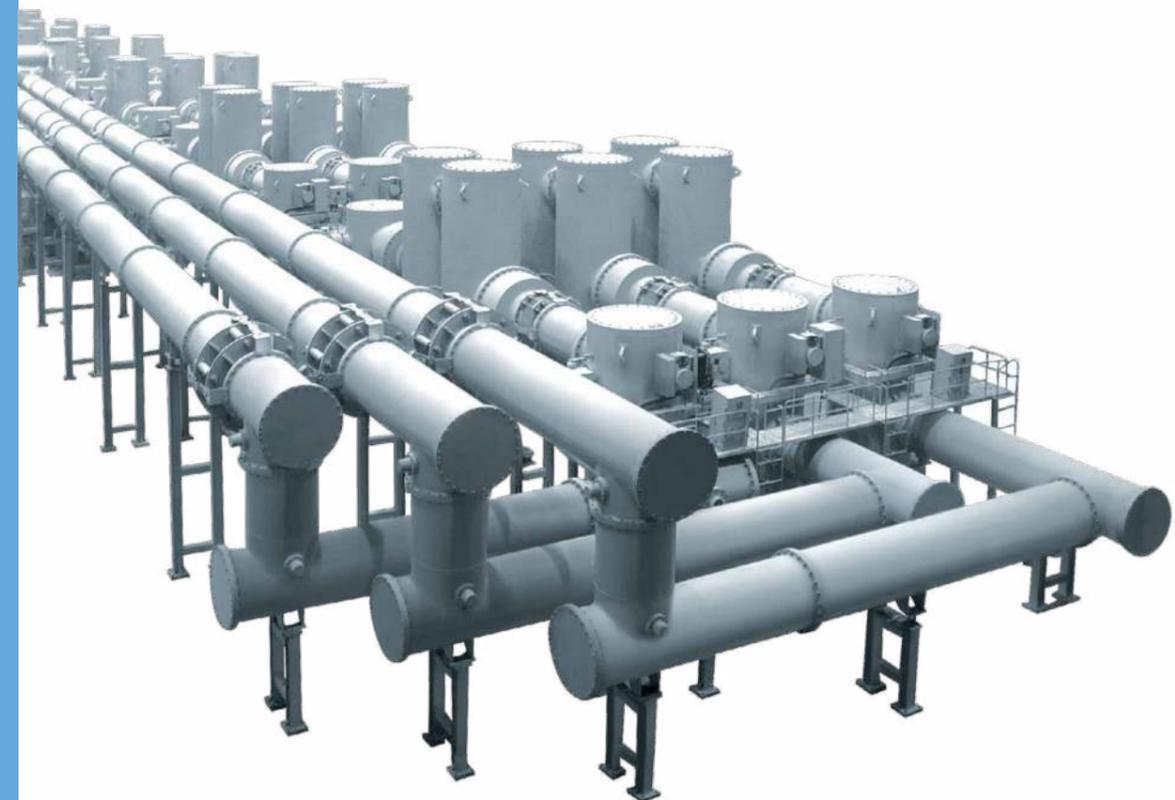



## What are the outstanding characteristic features of HD HYUNDAI GIS?

### ▶ Small space requirements

Availability and price of land play an important role in selecting the type of switchgear to be used. GIS substation requires only 5-10% installation space compared with conventional outdoor switchgear substations. Accordingly, HD HYUNDAI GIS makes it possible to install a substation in densely populated areas, mountainous terrains, etc. The GIS can be installed even in residential buildings and used effectively in limited space.

### ▶ Protection against contact with live parts

The earthed enclosure which contains all live parts of the switchgear provides extra safety to operating personnel.

### ▶ Protection against pollution

Since all live parts are contained in the metallic enclosure, they are fully protected against environmental effects, such as salt deposits in coastal regions, storms, ice, high temperature, air pollution, and humidity. Thus, high reliability can be attained.

### ▶ Aesthetic compatibility with surroundings

GIS meets recent requirements for aesthetic compatibility with its surroundings.

### ▶ Modular design and Easy maintenance

The GIS comprises as many standardized modules as possible, resulting in high quality production and easy assembly.

### ▶ Gas tightness

The seal-off system is adopted as our standard, resulting in a small number of pipes and valves. Thus, high reliability in gas tightness can be secured.

## Superior quality control system assures customer satisfaction

**Our responsibility is to produce equipment of high reliability**

HD HYUNDAI places great emphasis on quality assurance.

A stringent quality control system covers the entire manufacturing process.



▲ 4,000 kV impulse voltage generator




◀ AC high voltage test set




▲ Under factory test

◀ 145 kV 40 kA GIS under factory test

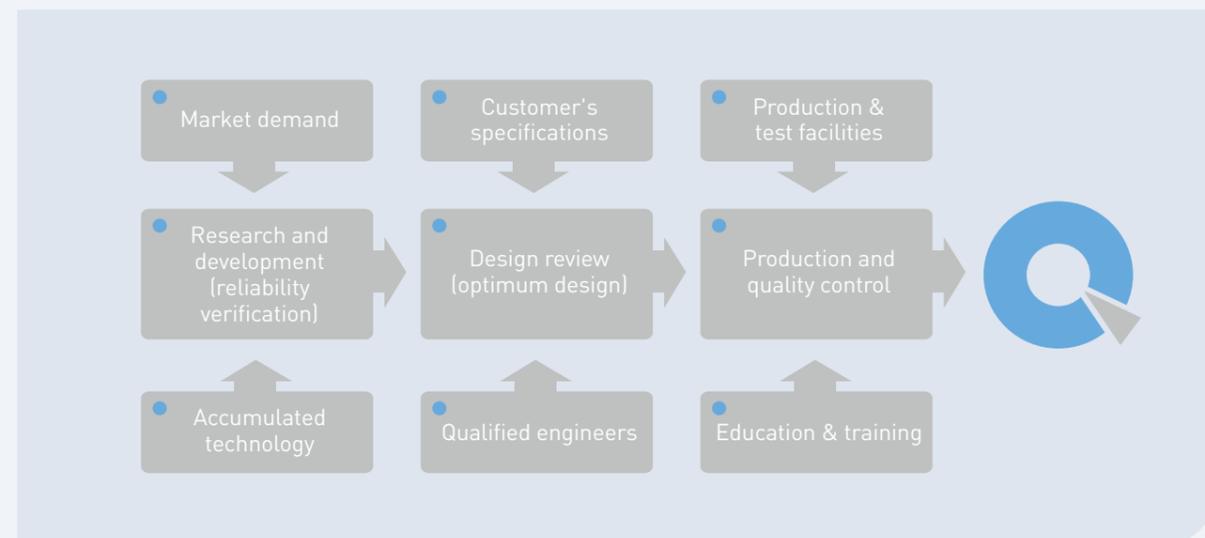

## Availability of various circuit arrangement

SF<sub>6</sub> Gas Insulated Switchgears of each rated voltage are essentially designed as standardized modules, so that all kinds of buses and feeders can be built up by the arrangement of these modules.

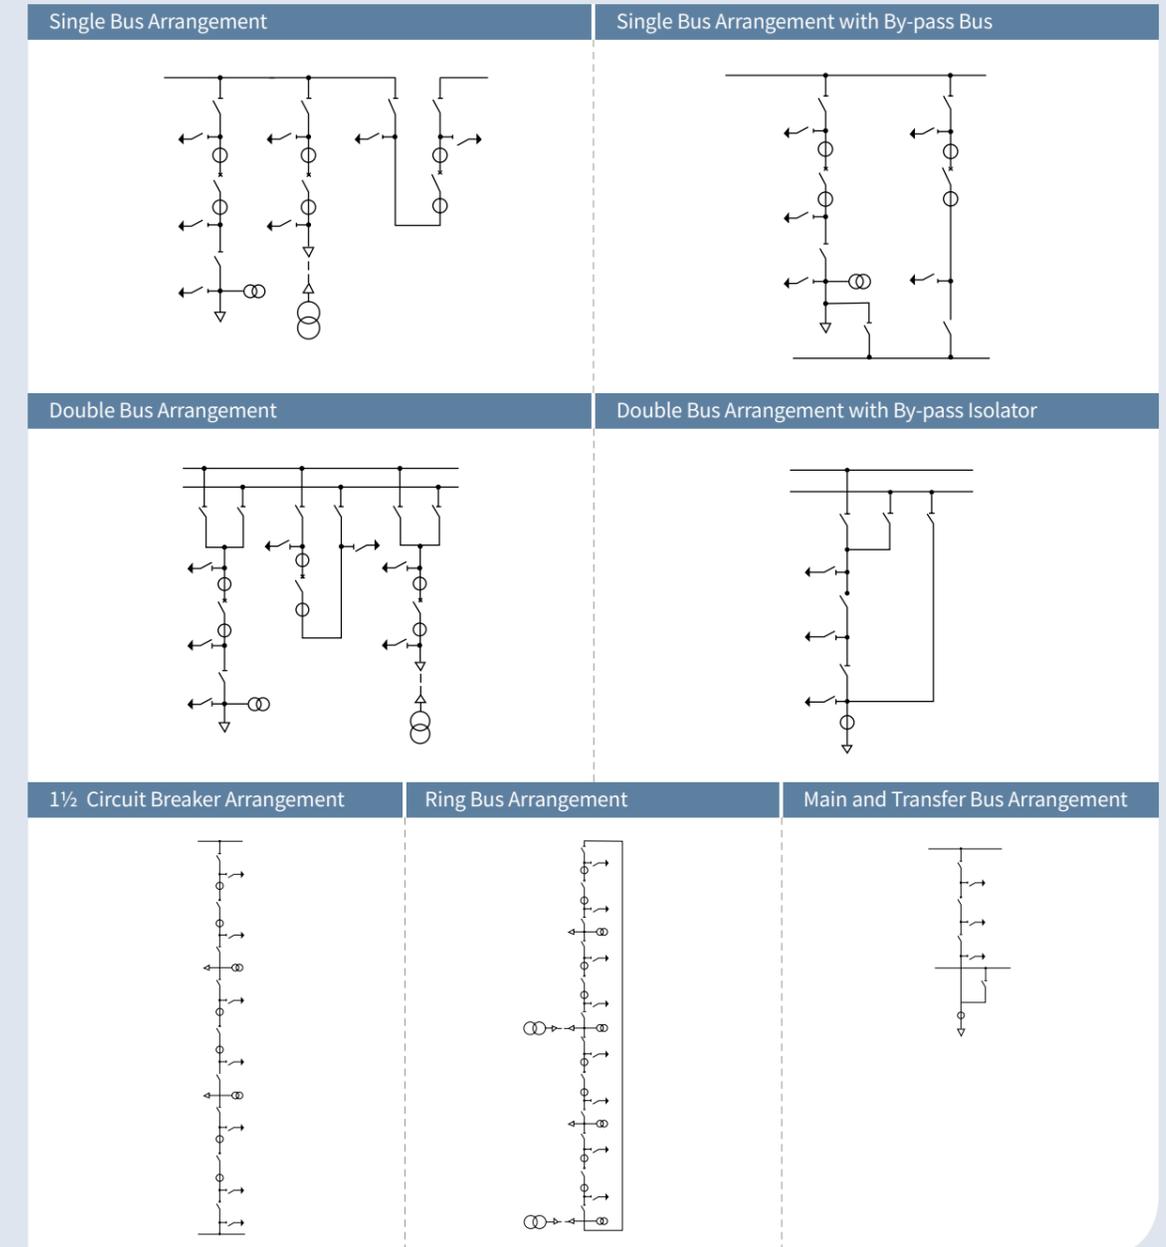

# Technical data



Type of GIS		72.5 SP	72.5 SP-1	
Rated voltage	kV rms	72.5	72.5	
Rated power frequency withstand voltage	kV rms	140	140	
Rated switching impulse withstand voltage	kV peak	-	-	
Rated lightning impulse withstand voltage	kV peak	325	325	
Rated frequency	Hz	50 / 60	50 / 60	
Rated normal current	A rms	2,000	2,000	
Rated short-circuit breaking current	kA rms	20	31.5	
Rated making current	Circuit breaker	kA peak	52	81.9
	Line earthing switch	kA peak	52	81.9
Rated short-time current (1 sec/3 sec)	kA rms	20	31.5	
Operating method	Circuit breaker		Motor spring	Motor spring
	Disconnecting switch		Motor/Manual	Motor/Manual
	Earthing switch		Motor/Manual	Motor/Manual
Rated SF <sub>6</sub> gas pressure (at 20°C)	Circuit breaker	MPa	0.5	0.6
	Other equipment	MPa	0.3	0.4
Break		1	1	

145 kV	170 SR	170 SR-N	300 SR	362 SR	362 SU	550 SR	800 SR
123 / 145	170	170	245	362	362	420/550	800
275	325	325	460	520	520	710	960
-	-	-	850	950	950	1,175	1,425
650	750	750	1,050	1,175	1,175	1,550	2,250
50 / 60	60	50	50 / 60	60	60	50	50 / 60
3,150	4,000	4,000	4,000	4,000	6,300	5,000	8,000
40	50	40	50 / 63	50	63	50 / 63	50
104	130	100	164	130	163.8	170	130
104	130	100	164	130	163.8	170	130
40	50	40	50 / 63	50	63	50 / 63	50
Motor spring	Hydraulic	Hydraulic (Single phase operation)	Motor spring, Hydraulic	Hydraulic, Pneumatic	Hydraulic	Hydraulic	Hydraulic
Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual
Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual	Motor/Manual
0.6	0.6	0.6	0.7	0.6	0.6	0.7	0.6
0.4	0.4	0.4	0.5	0.5	0.5	0.45 / 0.5	0.4
1	1	1	1	1	1	1	2

# Type 72.5 SP/SP-1 GIS for 72.5 kV 20 kA/31.5 kA

HD HYUNDAI 72.5 kV GIS is a quality product with integrated technology for more compact design and high availability.

### 72.5 SP


- 2-phase type GIS suitable for railway substation
- Reliable motor spring mechanism
- Ingenious modular system

### 72.5 SP-1

- 3-phase common enclosure type
- Combined disconnecter and earthing switch
- Reliable motor spring mechanism




Section of 72.5 SP GIS

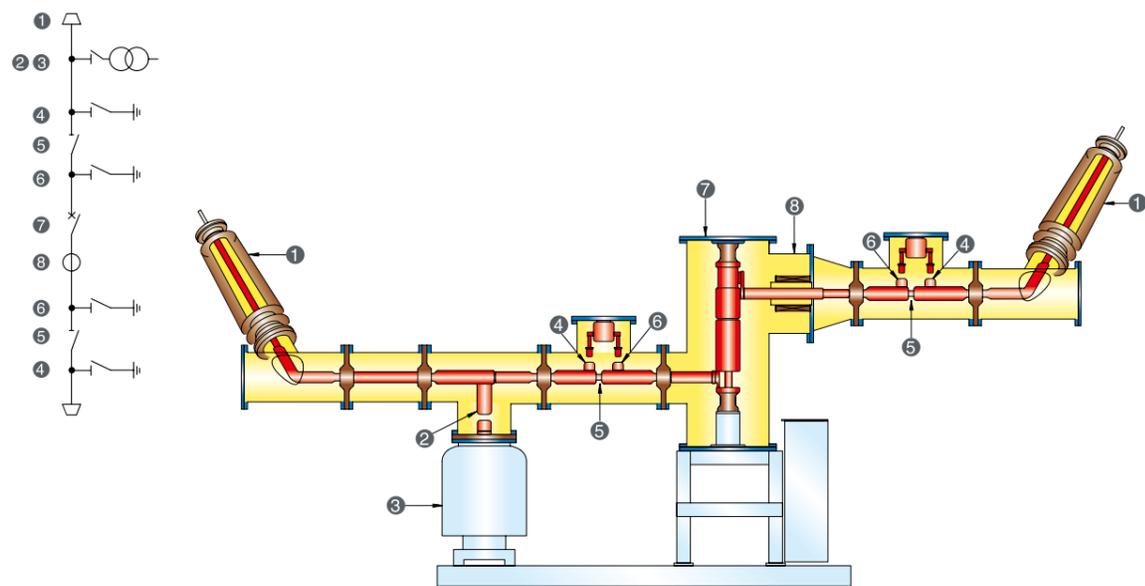

- |                       |                                   |                       |
|-----------------------|-----------------------------------|-----------------------|
| 1 Gas to Air Bushing  | 4 Earthing Switch Make-Proof Type | 7 Circuit Breaker     |
| 2 Disconnector for VT | 5 Line Disconnector               | 8 Current Transformer |
| 3 Voltage Transformer | 6 Earthing Switch for Maintenance |                       |

Section of 72.5 SP-1 GIS

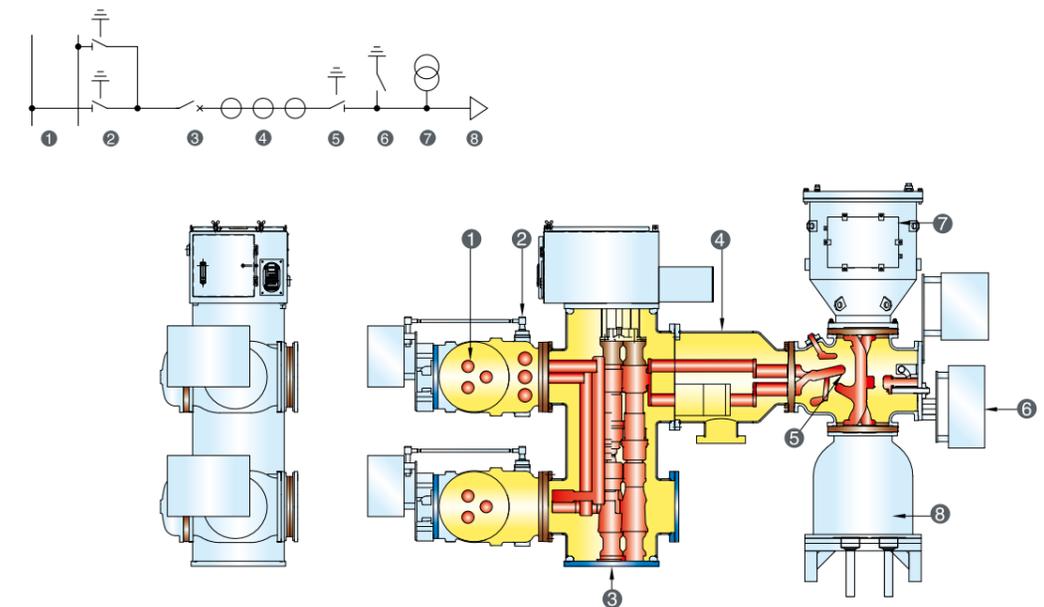

- |                     |                          |                       |
|---------------------|--------------------------|-----------------------|
| 1 Main bus          | 4 Current Transformer    | 7 Voltage Transformer |
| 2 3-Position Switch | 5 Line 3-Position Switch | 8 Cable Head Box      |
| 3 Circuit Breaker   | 6 Line Earthing Switch   |                       |

# 145 kV 40 kA GIS


Type 145 kV is arranged in module with utmost flexibility, which is designed with 3-phase common enclosure to reduce switchgear bay width and hysteresis loss.

## 145 kV

- Space saving, compact design
- Motor spring operation type
- Use of the thermal energy of the arc




### Section of 145 kV GIS

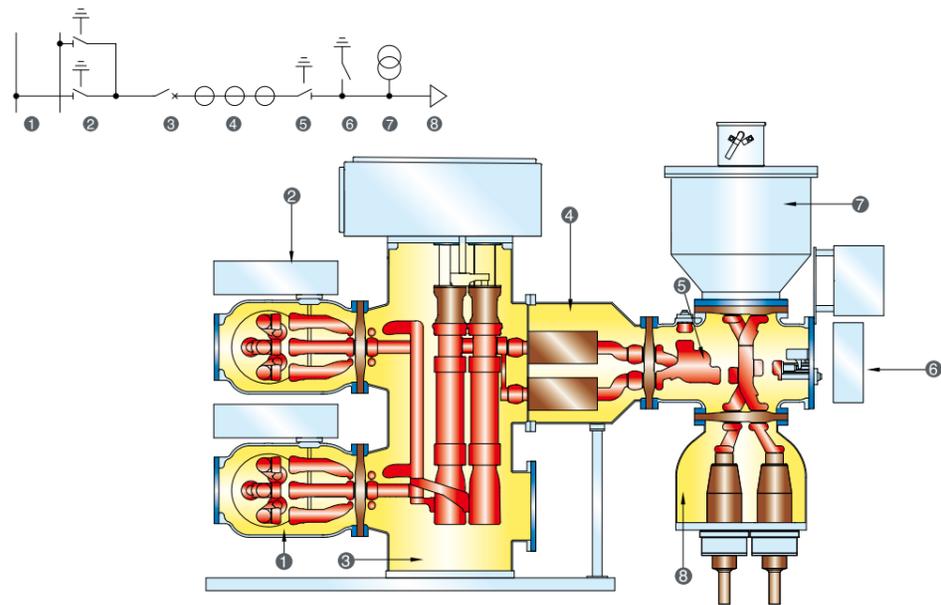


- |                     |                          |                       |
|---------------------|--------------------------|-----------------------|
| 1 Main bus          | 4 Current Transformer    | 7 Voltage Transformer |
| 2 3-Position Switch | 5 Line 3-Position Switch | 8 Cable Head Box      |
| 3 Circuit Breaker   | 6 Line Earthing Switch   |                       |

### Typical Arrangements

#### Single Bus

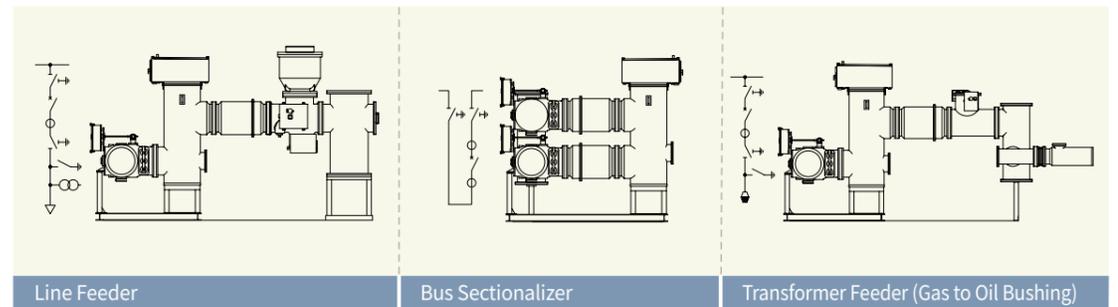

#### Double Bus

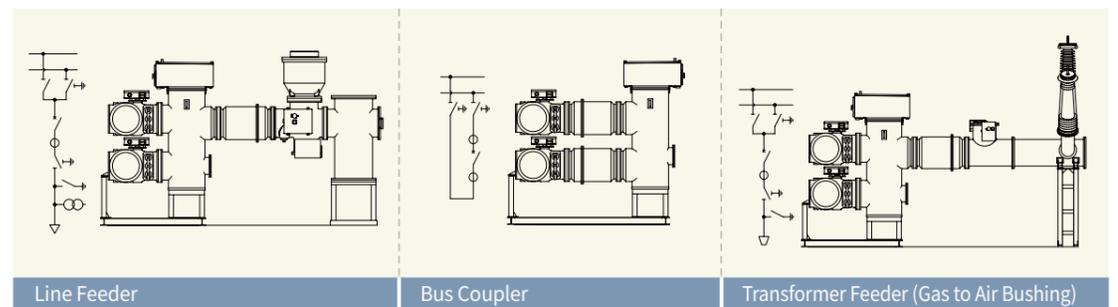

Bay width : 1,650 mm

# Type 170 SR GIS for 170 kV 50 kA

170 SR technology is based on many years of experience.

### Condenserless type circuit breaker


It minimizes the ferro-resonance phenomenon and has higher breaking capacity.

### Tightness of enclosure

It is obtained with well-trained manufacturing.




## Section of 170 SR GIS

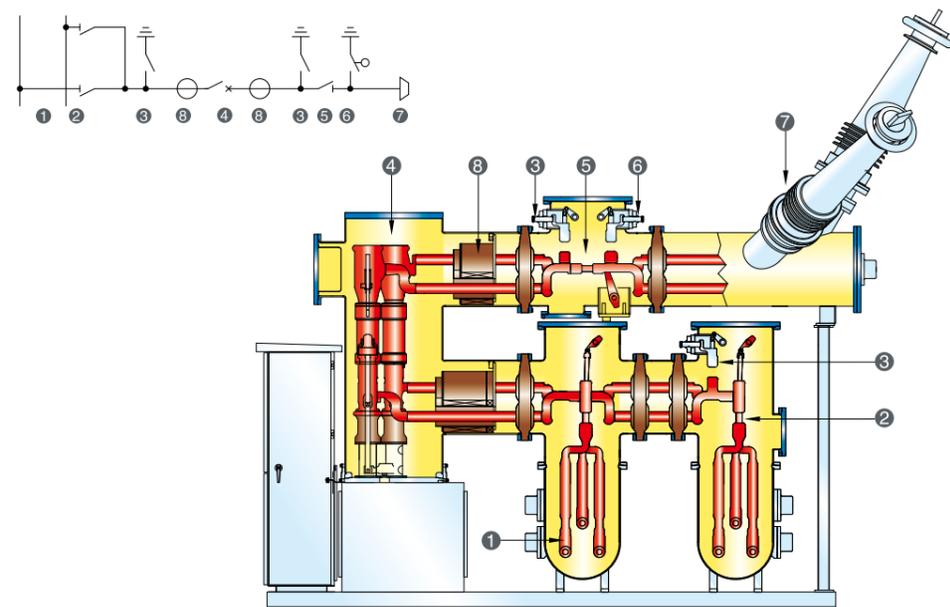


- 1 Main Bus
- 2 Bus Disconnector
- 3 Earthing Switch for Maintenance
- 4 Circuit Breaker
- 5 Line Disconnector
- 6 Make-proof Earthing Switch
- 7 Gas to Air Bushing
- 8 Current Transformer

## Typical Arrangements

### Single Bus

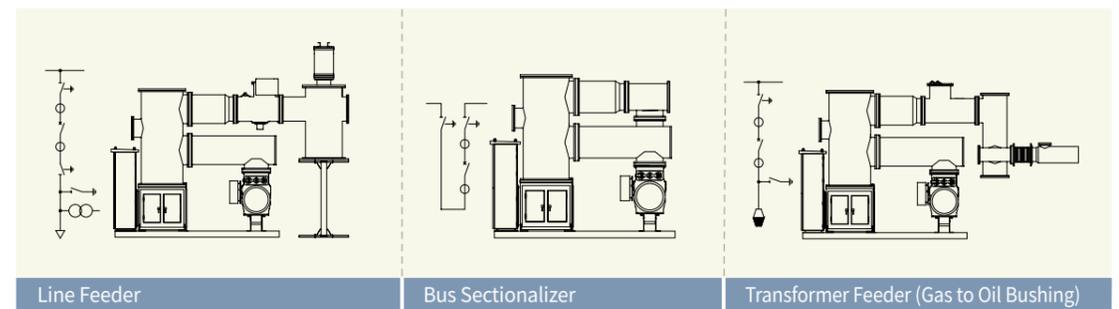

### Double Bus

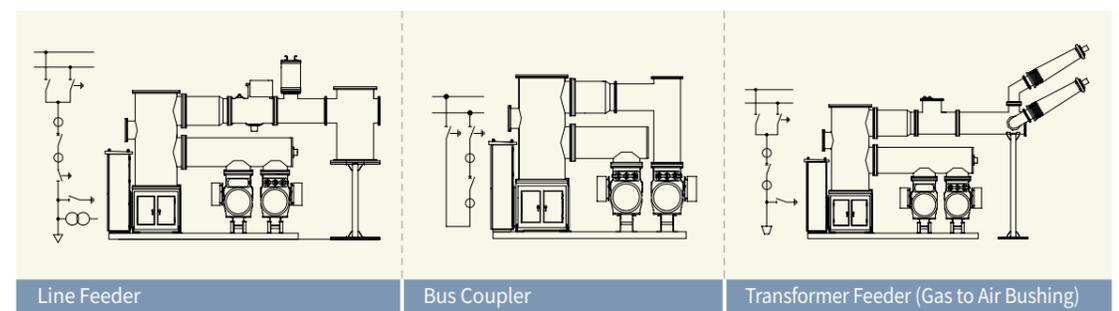

Bay width : 1,800 mm

## Type 300 SR GIS for 245 kV 50 kA/63 kA

To meet the wide range of different requirements from customers, this compact type 300 SR has been designed with the most reliable features such as single interrupter unit and motor spring or hydraulic operation from which modular elements are simply selected to permit virtual layout as desired.




## Type 362 SR/SU GIS for 362 kV 50 kA/63 kA

HD HYUNDAI 362 kV GIS includes 2 models divided by the rated short time current of 50 kA and 63 kA. Having pneumatic operating or hydraulic operating mechanism, 362 SR model can be easily arranged especially in the 1½ breaker system.




### Section of 300 SR GIS

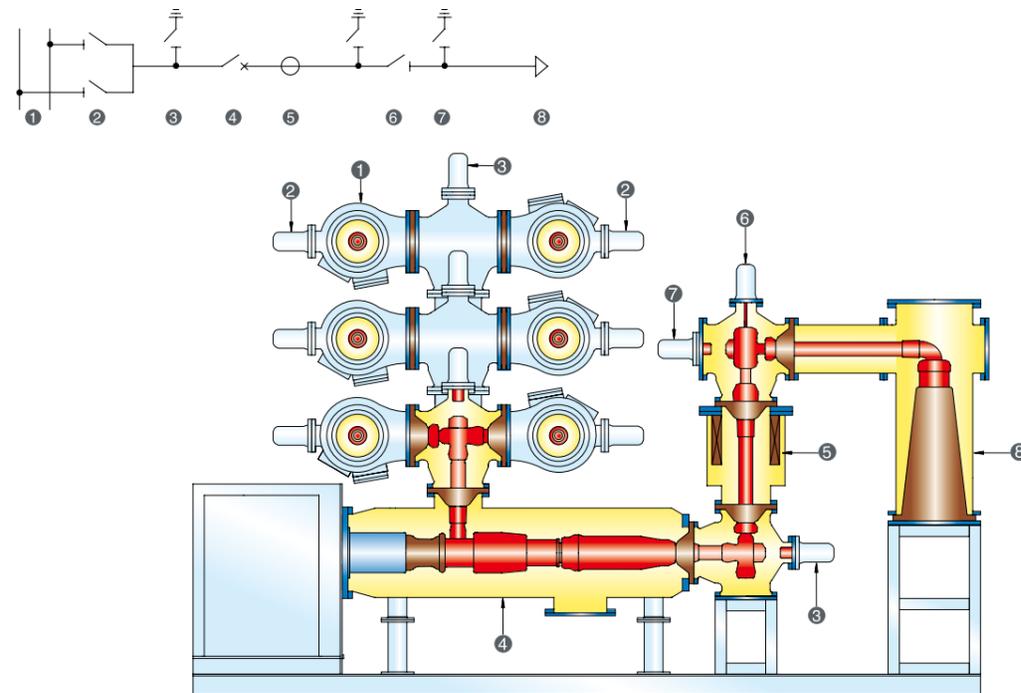

- 1 Main Bus
- 2 Bus Disconnector
- 3 Earthing Switch for Maintenance
- 4 Circuit Breaker
- 5 Current Transformer
- 6 Line Disconnector
- 7 Make-proof Earthing Switch
- 8 Cable Head Box

### Section of 362 SR GIS

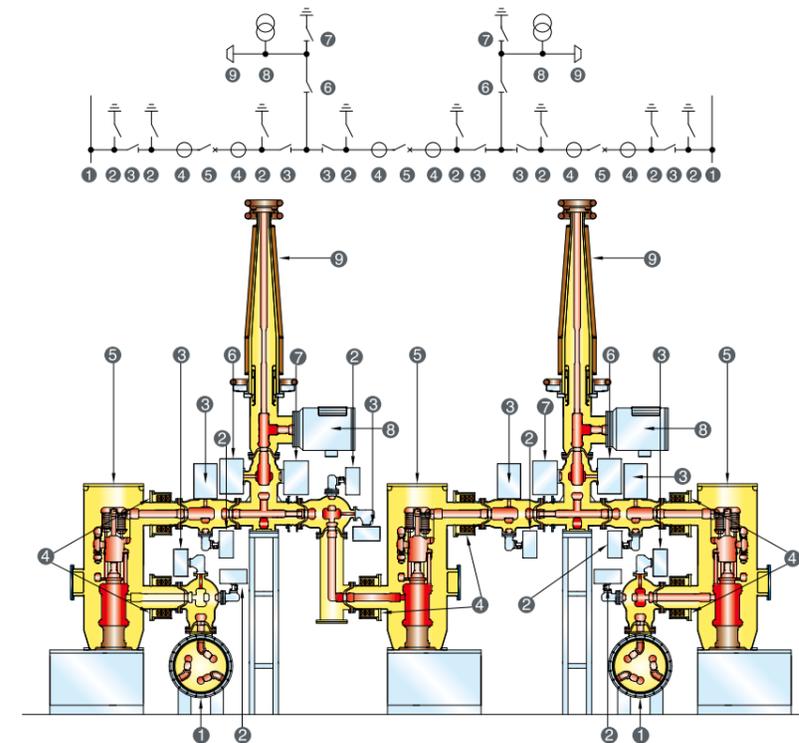

- 1 Main Bus
- 2 Earthing Switch for Maintenance
- 3 Bus Disconnector
- 4 Current Transformer
- 5 Circuit Breaker
- 6 Line Disconnector
- 7 Earthing Switch Make-proof Type
- 8 Voltage Transformer
- 9 Gas to Air Bushing

## Type 362 SR/SU GIS for 362 kV 50 kA/63 kA


Our new 362 kV 63 kA GIS (Model: 362 SU) is developed to meet the soaring demands of the GIS with high breaking capacity. Hydraulic mechanism is adopted to operate circuit breaker for high fault current interrupting up to 63 kA. High grade of corrosion resistant aluminium was selected for the enclosure. Due to the low weight, it is one of the lightest constructions of its kind. In addition, this model has the flexibility in the lay-out arrangements for various type of circuit configurations.

## Type 550 SR GIS for 420 kV/550 kV 50 kA/63 kA

There has been continuous demands for economic efficiency, compactness, high reliability, low operating cost & long operating life from GIS users. All these requirements are fulfilled by our switchgear type 550 SR for rated voltages up to 550 kV. The circuit breaker works on hydraulic mechanism with well-known puffer principle. One interrupter breaking system and 2cycle-breaking time show the prominent technology of HD HYUNDAI.




### Section of 362 SU GIS

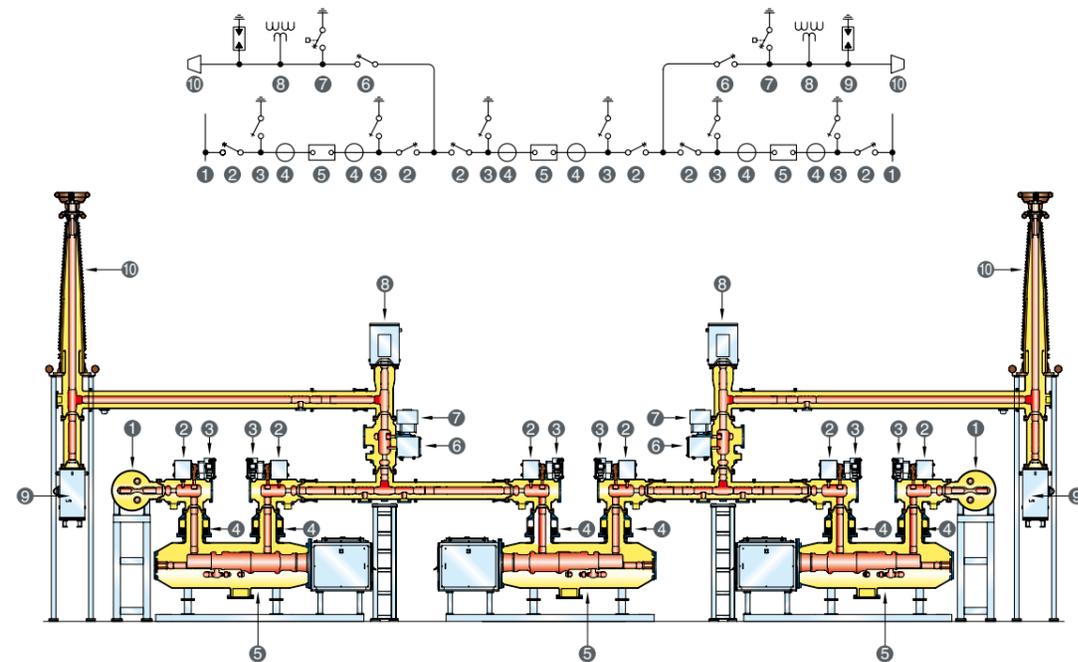

- 1 Main Bus
- 2 Earthing Switch for Maintenance
- 3 Bus Disconnector
- 4 Current Transformer
- 5 Circuit Breaker
- 6 Line Disconnector
- 7 Earthing Switch make-proof type
- 8 Voltage Transformer
- 9 Lightning Arrester
- 10 Gas to Air Bushing

Bay width : 6,500 mm

### Section of 550 SR GIS

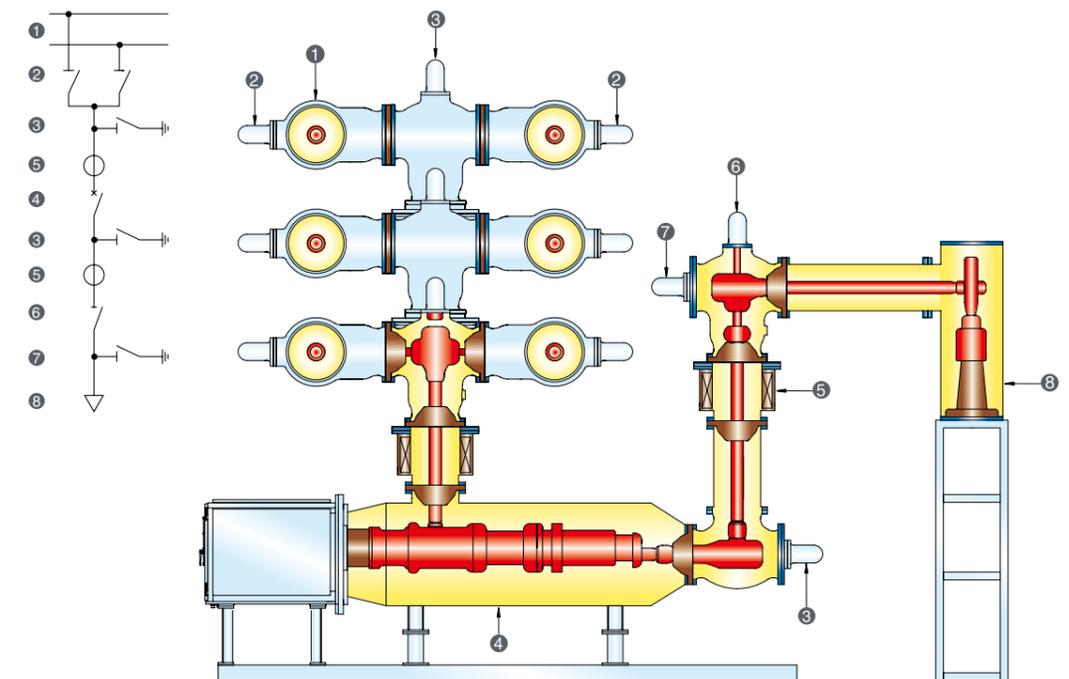

- 1 Main Bus
- 2 Bus Disconnector
- 3 Earthing Switch for Maintenance
- 4 Circuit Breaker
- 5 Current Transformer
- 6 Line Disconnector
- 7 Make-proof Earthing Switch
- 8 Cable Head Box


Bay width : 4,500 mm

# Type 800 SR GIS for 800 kV 50 kA

The 800 SR type GIS is a high-technology product, leading the future for the ultra-high voltage substation. Since the introduction of the 800 kV GIS in the year 2000, HD HYUNDAI has been one of the pioneers of this technology.



## Section of 800 SR GIS

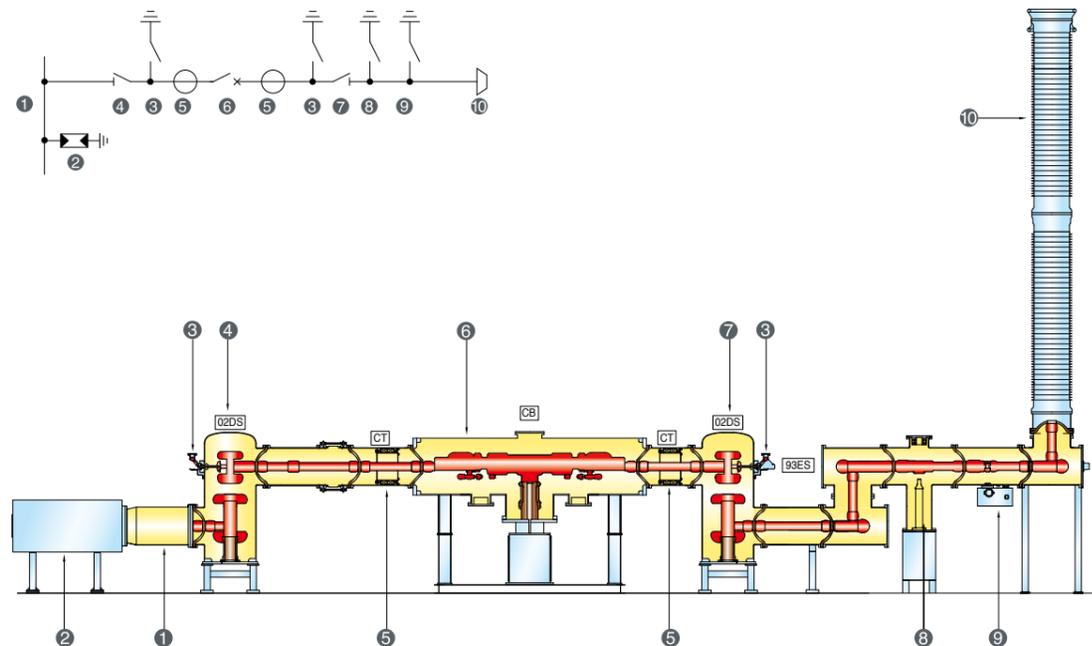

- 1 Main Bus
- 2 Lightning Arrester
- 3 Earthing Switch for Maintenance
- 4 Bus Disconnector
- 5 Current Transformer
- 6 Circuit Breaker
- 7 Line Disconnector
- 8 High Speed Grounding Switch
- 9 Line Earthing Switch
- 10 Gas to Air Bushing

Bay width : 6,500 mm

# Research & Development

Research & Development is an essential requirement for improvement and advance of modern technology.

HD HYUNDAI's commitment to research and development has been a motivating factor of the company's various technical achievements and will be vital in its advance into the 21st century.

HD HYUNDAI Electric is operating three renowned in-house research institutes: HMRI(HD HYUNDAI Maritime Research Institute), HIRI(HD HYUNDAI Industrial Research Institute) and HEMRI(HD HYUNDAI Electro-Mechanical Institute) as well as an overseas institute(H-TECH) in Budapest, Hungary.

In these institutes fully equipped with state-of-the-art R&D devices, our top-notch brains are exploring the future of high technology.

HD HYUNDAI Gas Insulated Switchgear has been supplied to most of the countries all over the world and its technology, quality and reliable performance have been widely acknowledged by the customers around the world.



## Certificates



ISO 9001 Certificates

KEMA Certificates

# Inquiry form

## 1. General Requirements

Applied standard : \_\_\_\_\_

Rated voltage : \_\_\_\_\_ kV

Rated frequency : 50 Hz  60 Hz

Rated power frequency withstand voltage : \_\_\_\_\_ kV

Rated switching impulse withstand voltage: \_\_\_\_\_ kV

Rated lightning impulse withstand voltage : \_\_\_\_\_ kV

Rated short-circuit breaking current : \_\_\_\_\_ kA

Rated duration of short circuit : 1 sec  3 sec

First-pole-to-clear factor : 1.3  1.5

Duty cycle (of circuit breaker) : \_\_\_\_\_

Operating time (of circuit breaker) : Break time \_\_\_\_\_ Cycle

Rated current : Main bus \_\_\_\_\_ A Feeder bus \_\_\_\_\_ A

Auxiliary voltage : Control voltage \_\_\_\_\_ V Motor voltage \_\_\_\_\_ V  
Heater voltage \_\_\_\_\_ V

Ambient temperature : Max \_\_\_\_\_ °C Min \_\_\_\_\_ °C

## 2. Instrument Transformers

Current transformer: Primary current : \_\_\_\_\_ A

Secondary current : \_\_\_\_\_ A

Burden : \_\_\_\_\_ VA

Accuracy class : \_\_\_\_\_

Voltage transformer: Primary voltage : \_\_\_\_\_ kV

Secondary voltage : \_\_\_\_\_ V

Tertiary voltage : \_\_\_\_\_ V

Accuracy class/Burden: \_\_\_\_\_ / \_\_\_\_\_ VA

## 3. Connections

Overhead line connection

Insulator creepage distance : \_\_\_\_\_ mm/kV

Cable connection

Cable type : \_\_\_\_\_

Cable size : \_\_\_\_\_

Please enclose single-line diagram of required GIS with this sheet

Quantity of GIS : \_\_\_\_\_ bay(s)

Delivery : \_\_\_\_\_

Site location (City, Town) : \_\_\_\_\_

Service condition : Indoor (  )  
Outdoor (  )



Environment-Friendly Technology  
HD HYUNDAI Gas Insulated Switchgear

### Korea

Head Office	477, Bundang Suseo-ro, Bundang-gu, Seongnam-si, Korea	Tel: +82-2-479-9180	Fax: +82-2-500-4958
Ulsan Factory	700 Bangeojinsunhwan-doro, Dong-gu, Ulsan, Korea	Tel: +82-52-202-8114	Fax: +82-52-202-8010
Reliability Center	17-10, Mabuk-ro 240beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do, Korea	Tel: +82-31-289-5000	Fax: +82-31-289-5040

### Overseas Subsidiaries

Atlanta	2405 Satellite Blvd, Duluth GA 30096, U.S.A.	Tel: +1-678-789-1885	Fax: +1-470-745-4443
Alabama	215 Folmar Parkway, Montgomery, AL 36105, U.S.A	Tel: +1-334-481-2000	Fax: +1-334-386-8994
Arabia	Office No. 529, 5th floor Akaria-3 Building, Olaya Street, PO Box 9187, Riyadh 11413, Kingdom of Saudi Arabia	Tel: +966-11-419-0168	Fax: +966-11-419-0220
Yangzhong	No.9, Xiandai Road, Xinba Scientific and Technologic Zone, Yangzhong, Jiangsu, P.R.C. Zip:212212, China	Tel: +86-511-8842-0510	Fax: +86-511-8842-0388

### Branch Offices

London	50-68 High Street, Weybridge, KT13 8BL, United Kingdom	Tel: +44-7979-125051	
Frankfurt	Eschborner Landstrasse 55, 60489 Frankfurt am Main, Germany	Tel: +49-69-7490-3934	
Moscow	World Trade Center, Ent.6, #412, Krasnopresnenskaya Nab.12, Moscow, 123610, Russia	Tel: +7-495-258-1381	
Riyadh	Office No. 530A, 5th Floor Akaria-2 Bldg., Olaya St., Short Address RHOB6847, Riyadh 12244, Kingdom of Saudi Arabia	Tel: +966-11-210-1107	Fax: +966-11-210-1107
Dubai	Unit 205, Emaar Square Building NO.4 Sheikh Zayed Road, Pobox 252458, Dubai, U.A.E	Tel: +971-50-321-8154	Fax: +971-4-425-7996
Bangkok	19th Floor, Unit 1908, Sathorn Square Office Tower, 98 North Sathorn Road, Silom, Bangrak, Bangkok 10500, Thailand	Tel: +66-02-115-7920	Fax: +66-2-115-7898
Ho Chi Minh	Room 1405, 14th Floor Centec Tower, 72-74 Nguyen Thi Minh Khai Street Vo Thi Sau Ward, District 3, Ho Chi Minh City, Vietnam	Tel: +84-28-3535-0465	
Osaka	1-Room 5th Floor Nagahori Plaza Bldg. 2-4-8 Minami Senba, chuo-ku, Osaka 542-0081, Japan	Tel: +81-6-6261-5766~7	Fax: +81-6-6261-5818

### R&D Centers

Switzerland	Hardturmstrasse 135, CH-8005, Zurich, Switzerland	Tel: +41-76-241-6707	
Hungary	H-1145 Bacskai utca 29/a, Budapest, Hungary	Tel: +36-1-273-3733	
China	Room 10102, Building 10, 498 Guoshoujing Road, Pudong, Shanghai, China(201203)	Tel: +86-21-5013-3393 #139	

Customer Service  
service@hd.com